

PLC-S-116

Fiber Optic PLC Splitter

1*16 Steel tube PLC Splitter



Overview

The AOA single-mode Planar Lightwave Circuit Splitter (PLCS) are developed based on unique silica glass waveguide process with reliable precision aligned fiber pigtail in a miniature package, it provides a low cost light distribution solution with small form factor and high reliability. Compliant with Telcordia GR-1209, Telcordia GR-1221, IEC 61753-1, IEC 61755-1 Grade B and EIA/TIA 598 standard.

The 1x16 Steel tube PLC Splitter devices have high performance in terms of low insertion loss, low PDL, high return loss and excellent uniformity over a wide wavelength range from 1260nm to 1650nm and working in temperature from -40°C to +80°C. The PLC Optical Splitters have standard configurations of 1x2, 1x4, 1x8, 1x16, 1x32, and 1x64 configurations, as well as customized structures of 2x2, 2x4, 2x8, 2x16, 2x32.

Features

- Compact design
- Low insertion loss and low PDL
- High reliability
- High channel counts
- Wide wavelength range
- Large operating temperature range
- Customized packaging and configuration

Applications

- FTTx Systems
- LAN, WAN and Metro Networks
- Analog/Digital Passive Optical Networks
- CATV Networks
- Other applications in fiber optic systems

Technical Specifications

Type	Parameters
Channel Number	1x16
Operating Wavelength (nm)	1260~1650
Fiber Type	G657A1 (default)
Fiber Length (m)	1 Meter (default)
Connector Type	Without connector, SC/UPC, SC/APC
Additional Loss Per Connector (dB)	≤0.25
Insertion Loss (dB)	without connector ≤13.6; with connector ≤13.8
Loss Uniformity (dB)	≤1.4
Polarization Dependent Loss (dB)	≤0.3
Return Loss (dB)	UPC ≥50; APC ≥55
Directivity (dB)	≥55
Package Dimension (mm)	Bare: 50x7x4 Fan-Out: 60x12x4
Operating Temperature (° C)	-40~85
Storage Temperature (° C)	-40~85
Relative Humidity	up to 82%

1. Specifications may change without notice


2. At the input and output of the splitter with connectors, each thread come with a numerical identification that details the order

Order Information

Type	Package	Port	Fiber Type	Input Pigtail	Fiber Length	Connector
PLC	□	□□□	□	□	□	□
	B=Bare Fiber	102=1x2	1=G652D	1=Bare fiber	1=1M	0=Without
	S=Steel Type	104=1x4	2=G657A	2=900μm	2=1.2M	Connector
	A=ABS Box	108=1x8	C=Customized	3=2.0mm	3=1.5M	1=SC/UPC
	M=Modular	116=1x16		4=3.0mm	C=Customized	2=SC/APC
	R=Rack-Mount	132=1x32				3=FC/UPC
	C=Customized	164=1x64				4=FC/APC
		202=2x2				5=LC/UPC
		204=2x4				6=LC/APC
		108=1x8				C=Customized
		116=1x16				
		132=1x32				
		164=1x64				

Example: PLC-S-116-2-2-1-1: Steel Type 1x16 G657A 0.9mm 1M SC/UPC

Dimensions

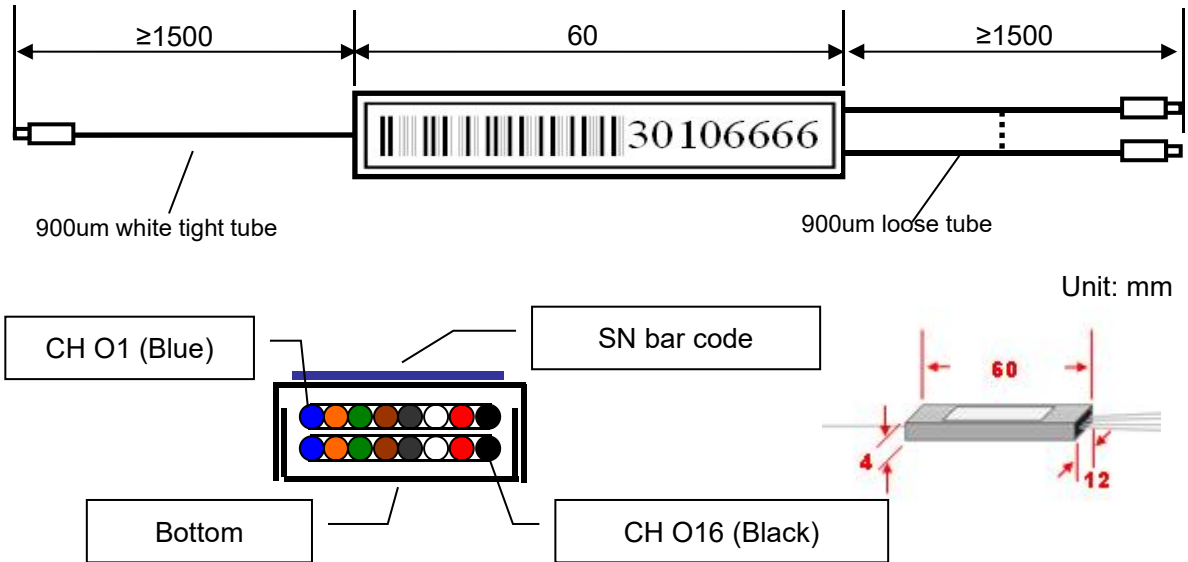

For further information, please visit our website <https://www.aoatech.com>

All rights are reserved by AOA Technology Co.,Ltd. AOA reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.