

FDB-10

NAP Fiber Distribution Box

Waterproof Wall-mount type NAP Box, Optitap Adapter, Accommodated
1*8 PLC splitter



Overview


FDB-10 FTTH Pre-connected Fiber Optical NAP Splitter Distribution boxes are widely used in outdoor FTTH Solutions; the assembly method can be wall-mounted or pole-mounted. It was designed to connect two different waterproof adapters, OptiTap or MINI SC/APC Adapters.

Features

- Protection IP Grade is IP67
- Material is PC+ABS
- With two different waterproof adapters: OptiTap or MINI SC/APC Adapters
- Max Capacity is 1x2 FBT+1X8 PLC Splitters.

Application

- Widely used in FTTH access network.
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks

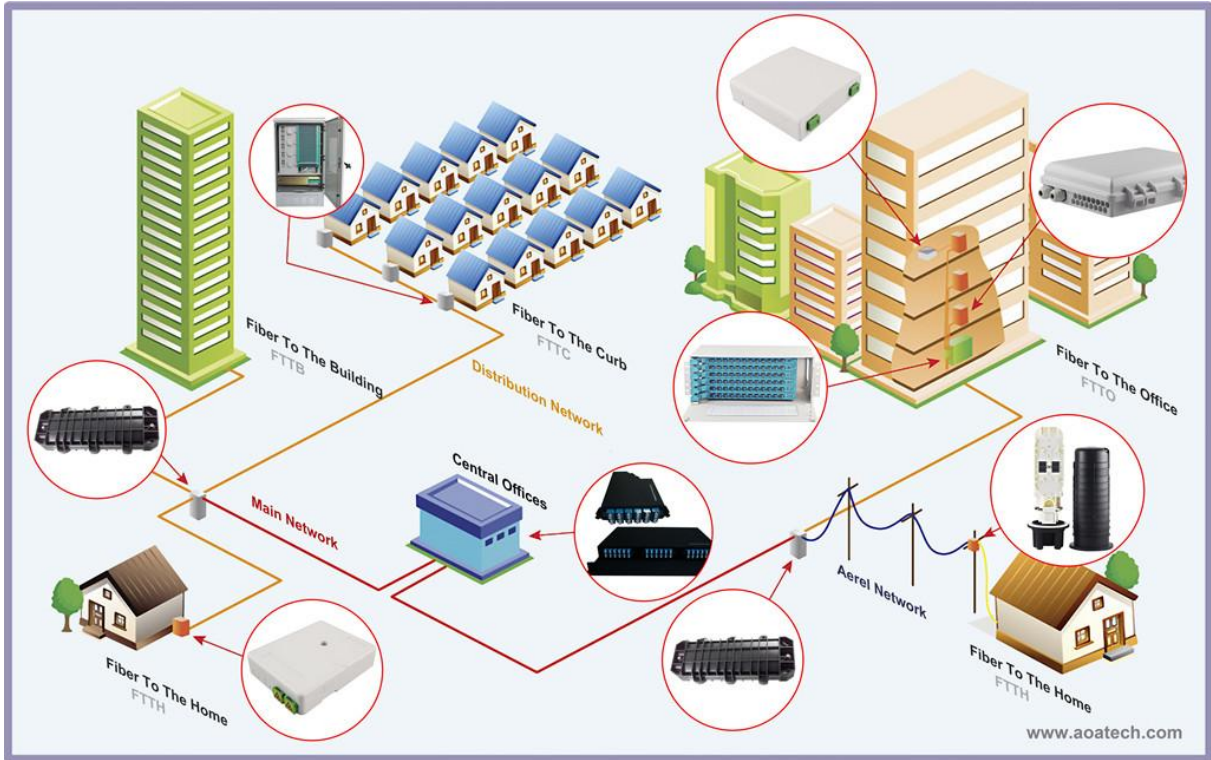

Technical Specifications

Parameter	Specifications
Size (HxWxD) mm	205.4*209*86
Input Ports	1 piece uncut port
Outports Adapter	10pcs Mini SC or OptiTap adapters
PLC Splitters	1x2 FBT+1X8 PLC Splitter
Installation Models	wall mount, pole mount and aerial mount
Protective Level	IP67
Material	PC+ABS
Color	Black
Curvature Radius (mm)	≥15
Working Temp.	-25℃ ~ +60℃
Storage Temp.	-40℃ ~ +70℃
Humidity	93%(+30℃)
Air Pressure	70KPa ~ 106KPa

Order Information

Model	Dimension	Max.Capacity	Note
FDB-10	205.4*209*86mm	8 ports & splice	Wall/Pole mount



For further information, please visit our website <https://www.aoatech.com>

All rights are reserved by AOA Technology Co.,Ltd. AOA reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.