

XFP-B1054L-100

Optical XFP Module

10Gbps XFP Transceiver Bi-Di TX1550/RX1490nm 100KM LC



Features

- Supports 11.1Gbps bit rates
- 1550nm EML laser and APD receiver
- Up to 100km for SMF transmission
- Hot-pluggable XFP footprint
- XFI Loopback Mode
- Compliant with XFP MSA with single LC receptacle
- 2-wire interface with integrated Digital Diagnostic monitoring
- EEPROM with Serial ID Functionality
- Single +3.3V power supply
- Power dissipation <3W
- Compatible with RoHS
- Operating case temperature:
 - Standard: 0 to +70° C
 - Industrial: -40 to +85° C

Application

- 10GBASE-BX 10.3125Gb/s Ethernet
- 10GBASE-BX 9.953Gb/s Ethernet
- SONET OC-192 SR-1 SDH STM I-64.1

Standard

- Compliant with XFP MSA
- Compliant with SFF-8472
- Compliant with IEEE 802.3ae

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V _{cc}	-0.3	4	V
Storage Temperature	T _s	-40	+85	°C
Operating Humidity	-	5	85	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Standard	0		+70	°C
	Industrial	-40		+85	°C
Power Supply Voltage	V _{cc}	3.13	3.3	3.47	V
Power Supply Current	I _{cc}			850	mA
Data Rate		9.95	10.3	11.3	Gbps
Transmission Distance		-		100	km

Optical and Electrical Characteristics


Parameter	Symbol	Min	Typical	Max	Unit	Notes
Transmitter						
Centre Wavelength	λ_c	1540	1550	1560	nm	
Spectral Width (-20dB)	$\Delta\lambda$			1	nm	
Side-Mode Suppression Ratio	SMSR	30	-		dB	
Average Output Power	P _{out}	0		5	dBm	

Average Launch power of OFF transmitter	P_{off}			-45	dBm	1
Extinction Ratio	ER	6			dB	
Data Input Swing Differential	V_{IN}	120		820	mV	2
Input Differential Impedance	Z_{IN}	80	100	120	Ω	
Supply Voltage – 1.8V supply	V_{cc2}	1.71		1.89	V	
Supply Voltage – 3.3V supply	V_{cc3}	3.13		3.47	V	
Supply Current – 1.8V supply	I_{cc2}			200	mA	
Supply Current – 3.3V supply	I_{cc3}			650	mA	
Module total power	P			2.5	W	
Interrupt Assert Delay	Interrupt_on			200	ms	
Interrupt Negate Delay	Interrupt_off			500	us	
Mod_NR Assert / Negate Delay				1	ms	
P-Down reset time		10			us	
XFP Interrupt, Mod_NR	Vol	0		0.4	V	
	Voh	$V_{ccHOST} - 0.5$		$V_{ccHOST} + 0.3$	V	
P_Down/RST	Vil	-0.3		0.8	V	
	Vih	2.0		$V_{cc3} + 0.3$	V	
TX Disable	Disable	2		V_{cc}	V	
	Enable	GND		$GND + 0.8$	V	
Receiver						
Centre Wavelength	λ_c	1480	1490	1500	nm	
Receiver Sensitivity				-24	dBm	3
Receiver Overload		-6			dBm	3
LOS De-Assert	LOS_D			-25	dBm	
LOS Assert	LOS_A	-38			dBm	
LOS Hysteresis		0.5		4	dB	
Differential Output Impedance	R_{out}	80	100	120	Ω	
Differential data output swing	$V_{out,pp}$	340		850	mV	
Data Output Rise/Fall time	tr/tf		20		ps	
LOS Output Voltage-High	V_{LOSH}	$V_{cc} - 0.5$		V_{cc}	V	
LOS Output Voltage-Low	V_{LOSL}	GND		$GND + 0.5$	V	

Notes:

1. The optical power is launched into SMF.
2. PECL input, internally AC-coupled and terminated.
3. Measured with a PRBS2³¹-1 test pattern @10312Mbps, BER ≤1×10⁻¹².

Pin Description

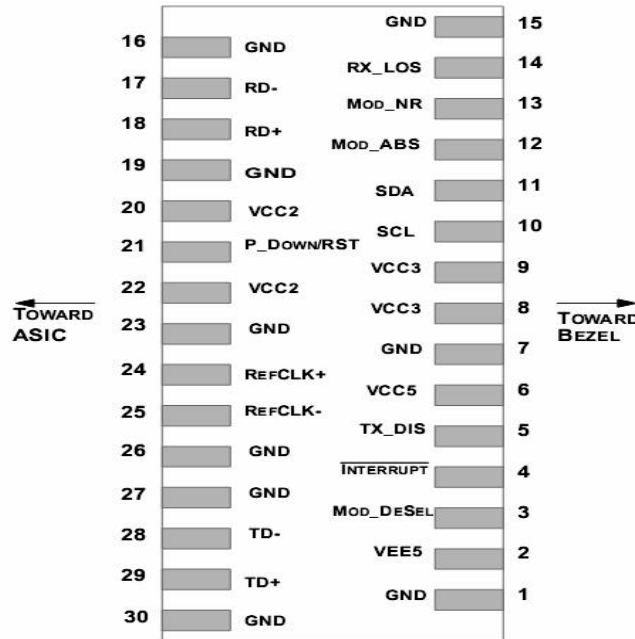

Pin	Signal Name	Description	Plug Seq.	Notes
1	GND	Module Ground		1
2	VEE5	Optional -5.2 Power Supply – Not required		
3	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	LVTTL-I	
4	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	LVTTL-O	2
5	TX_DIS	Transmitter Disable; Transmitter laser source turned off	LVTTL-I	
6	VCC5	+5 Power Supply		
7	GND	Module Ground		1
8	VCC3	+3.3V Power Supply		
9	VCC3	+3.3V Power Supply		
10	SCL	Serial 2-wire interface clock	LVTTL-I	2
11	SDA	Serial 2-wire interface data line	LVTTL-I/O	2

12	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	LVTTL-I	2
13	Mod_NR	Module Not Ready; XGIGA defines it as a logical OR between RX_LOS and Loss of Lock in TX/RX.	LVTTL-I	2
14	RX_LOS	Receiver Loss of Signal indicator	LVTTL-I	2
15	GND	Module Ground		1
16	GND	Module Ground		1
17	RD-	Receiver inverted data output	CML-O	
18	RD+	Receiver non-inverted data output	CML-O	
19	GND	Module Ground		1
20	VCC2	+1.8V Power Supply – Not required		
21	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset Reset; The falling edge initiates a complete reset of the module	LVTTL-I	
22	VCC2	including the 2-wire serial interface, equivalent to a power cycle. +1.8V Power Supply – Not required		
23	GND	Module Ground		1
24	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	PECL-I	3
25	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	PECL-I	3
26	GND	Module Ground		1
27	GND	Module Ground		1
28	TD-	Transmitter inverted data input	CML-I	
29	TD+	Transmitter non-inverted data input	CML-I	
30	GND	Module Ground		1

Notes:


Plug Seq.: Pin engagement sequence during hot plugging.

1) Module circuit ground is isolated from module chassis ground within the module.

2) Open collector; should be pulled up with 4.7k – 10kohms on host board to a voltage between 3.15V and 3.6V.

3) A Reference Clock input is not required.

Mechanical Dimensions

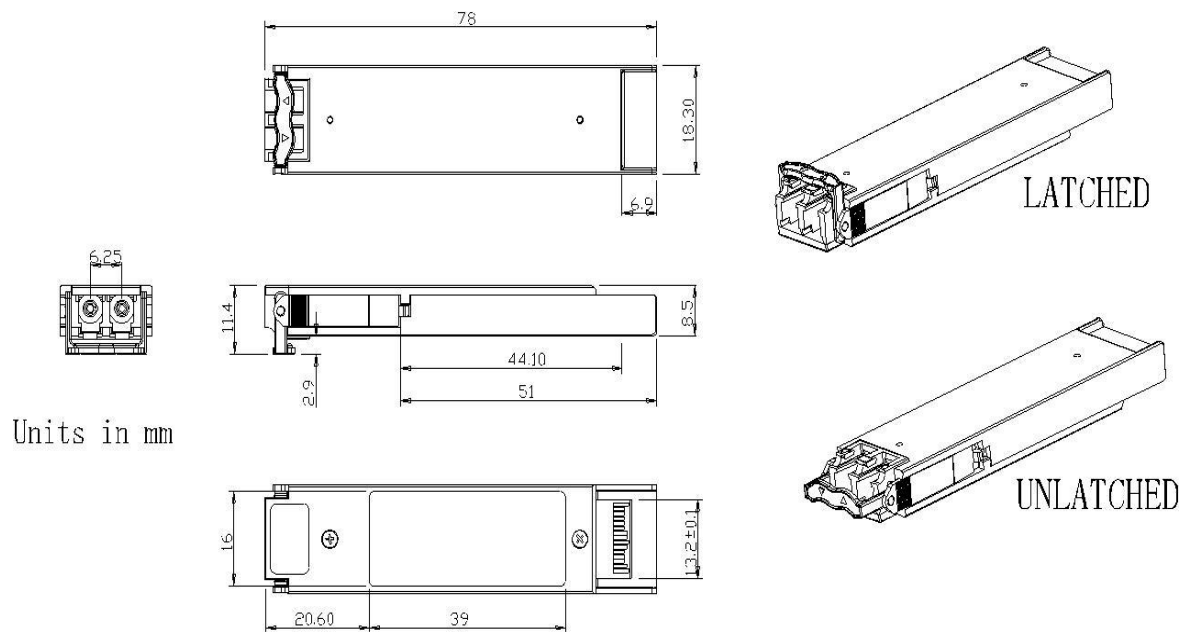

Ordering information

Model No.	Product Description
XFP-B1054L-100	10Gbps, Bidi TX1550/RX1490nm, SMF, 100km, 0°C ~ +70°C, with DDM
XFP-B1054L-100I	10Gbps, Bidi TX1550/RX1490nm, SMF, 100km, -40°C~+85°C, with DDM



For further information, please visit our website <https://www.aoatech.com>

All rights are reserved by AOA Technology Co.,Ltd. AOA reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.